

LEG	SUB	SITE	HOLE	CORE	TYPE	SEC
169		1035A		07R		02


ODP
VISUAL CORE DESCRIPTION

SEDIMENTS / SEDIMENTARY ROCKS

SECTION DESCRIPTION

OBSERVER

ZUF

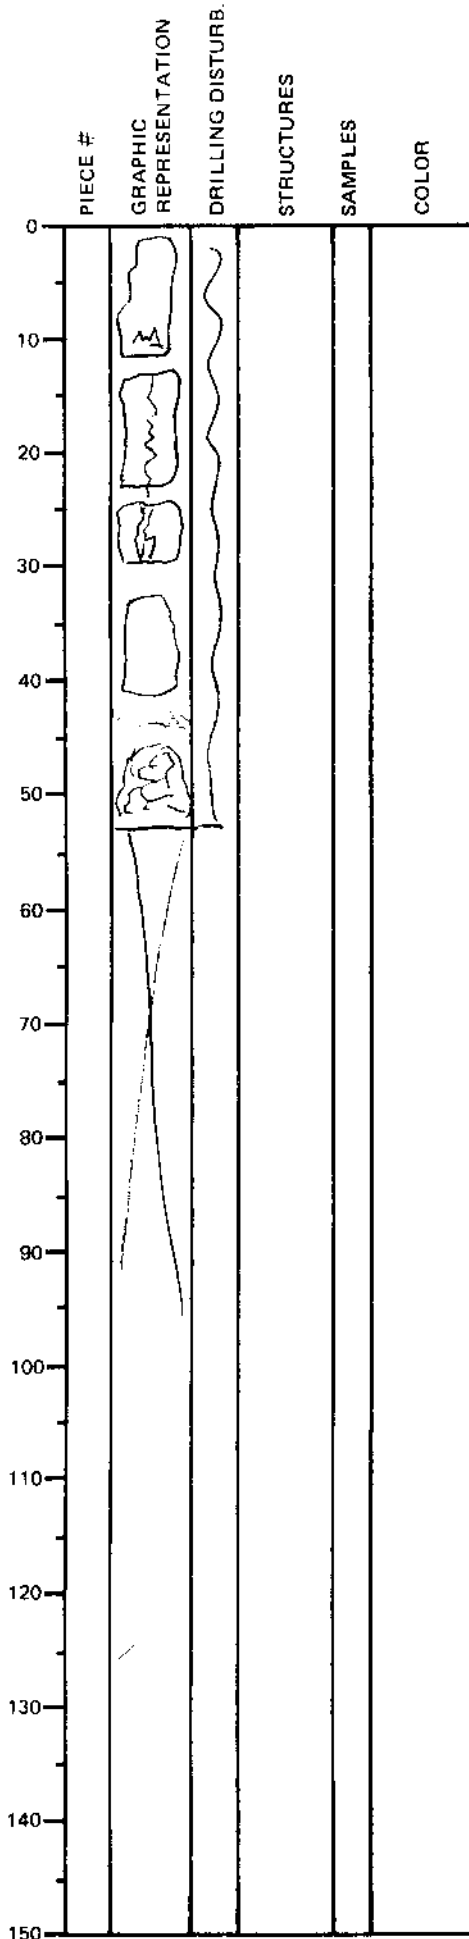

Highly fractured pieces (≤ 10 cm) of slightly indurated clay contained in silty clay which lines the linerwall (up to 1 cm)

Comment
Disturbed cores (by rotary drilling)

0 to 42 cm = nil (0%) sulfides.

42 to 46 cm 10% f.g.s. disseminated py and 5% anhydrite within drill induced(?) mud surrounding CLAY clasts.

46 to 50 cm = nil sulfides.